


## Features

- 3 3/4 Digits (4000 Counts)
- Auto / Manual Ranging
- True RMS – Flagship D.M.M.
- ACV Freq., Measurement
- 400  $\mu$ A Range in Both AC & DC
- With D/Cycle Test & Tr. (hFE) Test
- Auto Ranging Cap., Freq., & Temp., Tests
- A.P.O., NCV, D/H, REL, B/L & Torch
- A/V Continuity & Diode Test with Holster

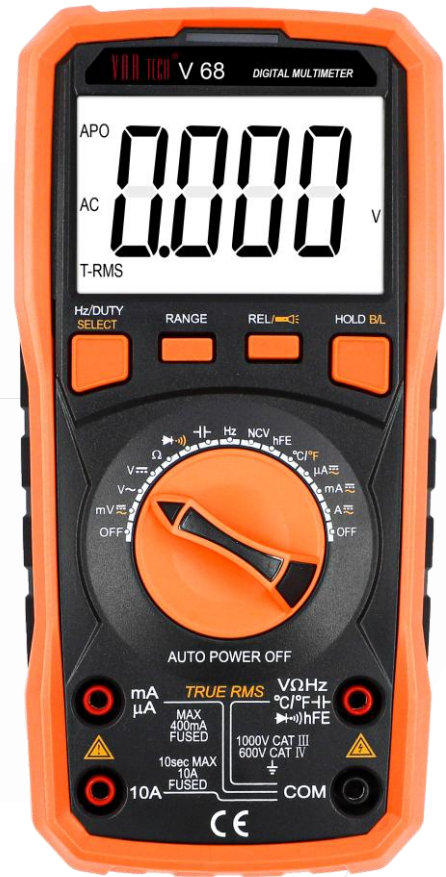

### SPECIFICATIONS

<b>DC Voltage</b>	Range	40 mV, 400 mV, 4 V, 40 V, 400 V, 1000 V
	Basic Accuracy	$\pm$ (0.5 % rdg + 4 digits)
<b>AC Voltage (True RMS)</b>	Range	40 mV, 400 mV, 4 V, 40 V, 400 V, 750 V
	Basic Accuracy	$\pm$ (0.8 % rdg + 10 digits). 40 Hz ~ 1 KHz Freq., Response.
<b>DC Current</b>	Range	400 $\mu$ A, 4000 $\mu$ A, 40 mA, 400 mA, 4 A, 10 A
	Basic Accuracy	$\pm$ (1 % rdg + 10 digits)
<b>AC Current (True RMS)</b>	Range	400 $\mu$ A, 4000 $\mu$ A, 40 mA, 400 mA, 4 A, 10 A
	Basic Accuracy	$\pm$ (1.5 % rdg + 10 digits). 40 Hz ~ 1 KHz Freq., Response
<b>Resistance</b>	Range	400 $\Omega$ , 4 K $\Omega$ , 40 K $\Omega$ , 400 K $\Omega$ , 4 M $\Omega$ , 40 M $\Omega$
	Basic Accuracy	$\pm$ (0.8 % rdg + 4 digits)
<b>Capacitance</b>	Range	6 nF, 60 nF, 600 nF, 6 $\mu$ F, 60 $\mu$ F, 600 $\mu$ F, 6mF, 60mF, 100mF
	Accuracy	$\pm$ (3.5 % rdg + 20 digits)
<b>Frequency</b>	Range	10 Hz, 100 Hz, 1 KHz, 10 KHz, 100 KHz, 1 MHz & 20 MHz - Auto Rang.
	Basic Accuracy	$\pm$ (0.5 % rdg + 10 digits)
<b>Temperature Measurement</b>		- 20 $^{\circ}$ C ~ 1000 $^{\circ}$ C (-4 $^{\circ}$ F ~ 1832 $^{\circ}$ F)
<b>Other Facilities / Features</b>		Auto / Manual Ranging, NCV, Torch, ACV Freq., Measurement, A/V Continuity Test, Diode Test, Tr. (hFE) Test, LCD Back Light, Data Hold, D/Cycle Meas., REL Meas., Auto Power Off, Low Batt., Indication.
<b>Accessories Supplied</b>		Holster (Installed), Test Leads, User Manual, Battery - 4 x AAA (Installed / Kept Aside), Cap. / Tr. Test Adaptor & Temperature Probe.
<b>Dimension &amp; Weight</b>		186 x 92 x 52 mm & Approx. 400 gms. (With Batt. & Holster)

\* All Specifications & appearances are subject to change without prior notice

