




Features

- 30000 Counts TFT Display
- Dual Display
- Auto / Manual Ranging
- With P.C. Interface
- True RMS
- 1000 / 750 V DC / AC
- 10 A AC / DC
- Cap., Temp., & Freq., Tests
- Data Record, Run / Stop, Math, Etc.,
- Continuity & Diode Test
- Type C Charging, Built in RC Battery

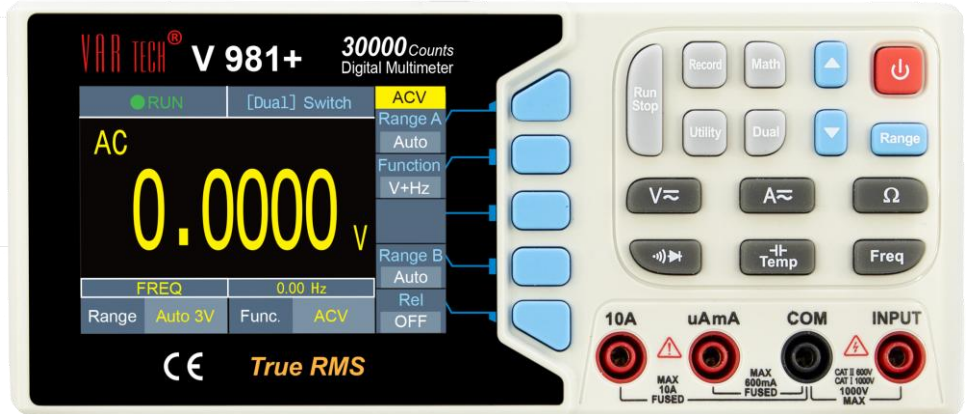

Specifications :

SPECIFICATIONS		
DC Voltage	Range	300 mV, 3 V, 30 V, 300 V, 1000 V.
	Basic Accuracy	3 V to 300 V ranges : $\pm (0.05 \% \text{ rdg} + 5 \text{ digits})$
AC voltage (TRUE RMS)	Range	300 mV, 3 V, 30 V, 300 V, 750 V.
	Basic Accuracy	3 V to 300 V ranges (40 Hz ~ 400 Hz) : $\pm (0.8 \% \text{ rdg} + 25 \text{ digits})$
DC current	Range	300 μ A, 3 mA, 30 mA, 300 mA, 3 A, 10 A.
	Basic Accuracy	300 μ A, to 300 mA ranges : $\pm (0.15 \% \text{ rdg} + 20 \text{ digits})$
AC current (TR RMS)	Range	300 μ A, 3 mA, 30 mA, 300 mA, 3 A, 10 A.
	Basic Accuracy	300 μ A & 3 A range (40 Hz ~ 400 Hz) : $\pm (0.8 \% \text{ rdg} + 30 \text{ digits})$
Resistance	Range	300 Ω , 3 K Ω , 30 K Ω , 300 K Ω , 3 M Ω , 30 M Ω , 300 M Ω
	Basic Accuracy	300 Ω to 300 K Ω ranges : $\pm (0.5\% \text{ rdg} + 10 \text{ digits})$
Capacitance	Range	30 nF, 300 nF, 3 μ F, 30 μ F, 300 μ F, 3 mF, 30 mF, 300 mF.
	Basic Accuracy	300 nF to 3 mF ranges : $\pm (4.0 \% \text{ rdg} + 50 \text{ digits})$
Frequency / Duty Cycle	Range	10 Hz ~ 300 MHz.
	Basic Accuracy	$\pm (0.1 \% \text{ rdg} + 5 \text{ digits})$
Temperature	Range	-40.0 $^{\circ}$ C ~ 1000.0 $^{\circ}$ C (-40.0 $^{\circ}$ F ~ 1832.0 $^{\circ}$ F)
	Basic Accuracy	$\pm (1.0\% + 3 \text{ }^{\circ}\text{C})$
Other Facilities	Auto Power Off (Adjustable), dBm, Diode test, Continuity Test, REL, Data Hold, Max., Data Rec., Run/Stop, Math Etc.	
Power source	Li-Ion Rechargeable Battery - Type 'C' Charging.	
Dimension & Weight	200 x 90 x 70 mm (W x H x D) & Approx. 0.8 Kg.	

*All Specifications & appearances are subject to change without prior notice.

